

GLOBAL JOURNAL OF ENGINEERING SCIENCE AND RESEARCHES
FACE RECOGNITION OF PROFILE IMAGE STORED ON BLOB**Prof. Shweta BhelondeMuley¹, Ketakee Dangre²**

1(Department of Computer Engineering , S.R.P.C.E, Nagpur)

2 (Department of Computer Engineering, J.I.T, Nagpur)

ABSTRACT

Face acknowledgment is a combination of face detection and face recognition. For recognized person look in biometric framework a few strategies are accessible, for example, thumb impression, signature identification, eye to eye connection, design coordinating, picture approval etc. In this paper we surveyed existing face recognition methods and techniques and implemented algorithm for face factor. Recently face recognitions advanced feature than thumb impression. Also gives paper insight about storing the detected image of face on blob.

Keywords: Face recognition, PCA, Blob, Recognition rate.

I. INTRODUCTION

Person identification is one of the most crucial building blocks for smart interactions. Among the person identification methods, face recognition is known to be the most natural ones, since the face modality is the modality that uses to identify person in various app. Although other methods, such as fingerprint identification, can provide better performance but are not appropriate for natural smart interactions due to their intrusive nature. Workers of mines as Fingerprint impression changes with time so it difficult to software to identify person. Pattern Recognition technique also in trending applications in Telephone directory, Military as Automatic target Recognition ,Multimedia Database retrieval as Optical character recognition etc keeping pattern but disadvantage is tedious and critical to decrypt . In contrast, face recognition provides passive identification that is the person to be identified does not need to cooperate or take any specific action. So a company can recognize its regular employees while they are entering the company.[1]

Early face recognition calculations utilized simple picture process models, nowadays acknowledgment

Technique has expanded into stylish mathematical portrayals and indistinguishable strides in past years a few upgrades occurred and various innovations comes into the spotlight. This strategy is created in order to stay away from the manual work for coming into the information. Specialist administration is being one more favorable position by misuse this strategy to hinder from programmer and intruder.

Essentially confront recognition went for actualizing a framework that is utilized for trademark the workers in a corporation for denoting their going to and taking care of their leave. so confront acknowledgment is utilized to stamp the nearness of the workers. Good attending misuse Real Time Face Recognition (SMART-FR) gives adaptability to spot numerous workers at steady time severally rather than trademark one by one [2]Distributed computing is the most requesting and rising innovation all through the world. Distributed computing is a web based PC innovation, where virtual shared server gives programming, framework, stage, gadget and different assets and facilitating to client on a compensation as-you-utilize premise. Distributed computing model advances numerous web applications in light of its versatility nature. This kind of figuring decreases working expense and builds the productivity of registering. Despite the fact that productivity expanded, still there is security danger for the information that is put away in outsider region particularly in Internet. Because of information security issue with distributed computing numerous business association have fear in putting away their information in Cloud. So the most difficult task of the business association is to give high security to their information since the information are sensible identified with their business? [3] [4]

For client with a lot of unstructured information to store in the cloud, Blob stockpiling offers a practical and versatile arrangement. We can utilized Blob stockpiling to store substance, for example,

- Financial Documents, Thesis
- Social information, for example, photographs, recordings, music and web journals
- Backups of records, PCs, databases and gadgets
- Images and content for web applications
- Configuration information for cloud applications
- Big information, for example, logs and other expansive datasets

Each blob is sorted out into a holder. Holders likewise give a helpful method to appoint security polices to bunch the protest. A capacity record can contain any number of holders, and a compartment can contain any number of blobs, up to the 500 TB limit breaking point of the capacity account.

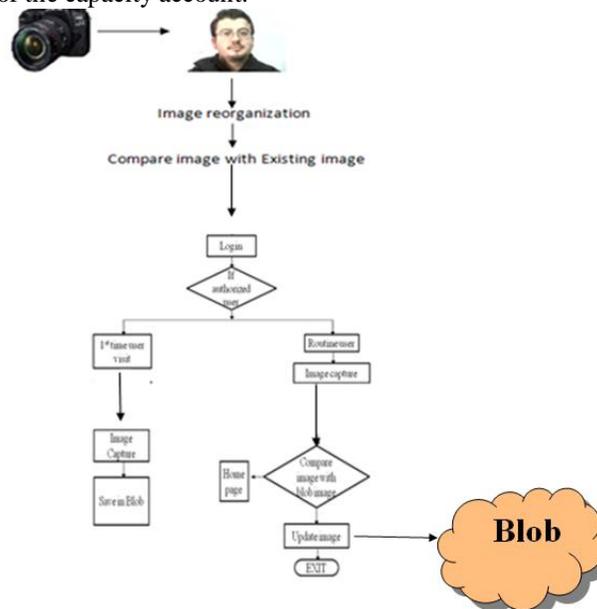


Fig 1 : general way of image recognition

Blob stockpiling offers three sorts of blobs, piece blobs, add blobs, and page blob (plates). Piece blobs are improved for spilling and putting away cloud questions, and are a decent decision for putting away archives, media documents, reinforcements and so forth. Attach blobs are like piece blobs, yet are enhanced for affix tasks. An attach blob can be refreshed just by adding another piece to the end. Add blobs are a decent decision for situations, for example, logging, where new information should be composed just to the finish of the blob.

Page blobs are upgraded for speaking to IaaS service of cloud and supporting irregular composes, and might be up to 1TB in estimate. An Azure virtual machine organizes connected IaaS service is a VHD put away as a page blob. For substantial datasets where organize requirements make transferring and downloading information to Blob storage over the wire farfetched, you can dispatch a hard drive to Microsoft to import or fare information specifically from the server. See Use the Microsoft Azure Import/Export Service to Transfer Data to Blob Storage. You can likewise duplicate blob information inside your storage account or crosswise over capacity accounts.

II. LITERATURE SURVEY

In this paper automatic facial expression recognition (AFER) system is proposed. Methodology were *Face Portion Localization and Feature Extraction*, Facial feature segment localization on catching facial expression. Neural network model used for JAFFE database for Six permanent Facial features like eyebrows(left and right), eye (left and right) , mouth and nose and categorized with surprise, sad, happy ,angry expression. Finally on experimental approach hybrid technique such as ANFIS used [1].

This paper surveyed about Principle component analysis (PCA), Fisherfaces, and Local Binary Patterns (LBP), Linear discriminated analysis (LDA) ,fisherfaces of facial trait code all these algorithm in tabulated format on Neutral, Illumination, Expression, Pose accuracy was tested and new approached algorithm Ensemble Voting Algorithm (EVA) for same parameter accuracy was calculated. And find out EVA algorithm shows better than existing algorithm. Results are shown with the help of ROC curve experiment.[2]

Author proposed Eigen face method for different expression of person in Eigen vectors calculated from covariance matrix and tested the feature vectors of the training images with feature vector of input testing image and performance is evaluated Cumulative Match Characteristic (CMC) metric equation. For different test set. But there was certain limitation of their work.[3]

Author proposed for enhanced face detection has to evolve using hybrid methods of soft computing tools such as ANN, SVM and Gabor filter (Feature Extractor) may yields better performance in terms of face detection rate and accuracy.[4] In this paper author studied Edge detection algorithm and find out Independent Component Analysis (ICA) is better than Principal Component Analysis. Edge detection method is used to reduce the amount of unknown data in an image which increases the accuracy of image.[7]

Author proposed the fusion of linear binary pattern and local phase quantization (LBP&LPQ) give better performance for face recognition .also they studied various algorithm such as Local binary pattern, Local Phase Quantization, Phase-Only Correlation, Local binary Patterns & Nearest Feature Space (LBP&NFS). Various approaches for face recognition like appearance base feature base types are discussed.[9]

Here author used two toolboxes for experimental purpose one for Eigen face on MATLAB while other Neural network based face recognition on other tool box used.They roughly calculated values and shows results.[12]

Here PCA method is used for face recognition to acquired accurate result used Euclidean distance classification method so values several issues can resolved like the computational time complexity. Authors detailed studied about PCA algorithm to converted correlated variable into set of linearly uncorrelated variables. They explained algorithm and giving knowledge of importance of Principal component analysis in face recognitions.[14]

III. METHODOLOGY

There are difference between Face detection and face recognition technique.

1. **Principal Component Analysis Algorithm:** The arrangement and improvement of a demonstrating ground for prototyping of fixed stand up to area and affirmation counts. The embedded device has a processor, camera, shading feature, and remote frameworks organization. Eigen faces approach for defy affirmation is executed as our last wander. Face affirmation has been a dynamic district of research with different applications since late 1980s. Eigen face approach is a standout amongst the most timely appearance-based face affirmation systems, which was created by M. Turk and A. Pentland in 1991. This methodology utilizes the likelihood of the key section examination and rots face pictures into a little game plan of trademark feature pictures called Eigen faces. Affirmation is performed by envisioning another face onto a low dimensional straight "face space" described by the Eigen faces, trailed by handling the detachment between the resultant position in the face space and those of known face classes. Different examinations were done to evaluate the execution of the face affirmation structure we have made. The results show that the Eigen stand up to approach is effective to head/go up against presentation, however delicate to scale and lighting up.

2. **Real time Face Recognition (SMART - FR) :** Human face acknowledgment in a constant foundation for an organization to check the participation of their representatives. So Smart Attendance utilizing Real Time Face Recognition is a genuine arrangement which accompanies everyday exercises of taking care of workers. The assignment is extremely troublesome as the constant foundation subtraction in a picture is as yet to test. To distinguish continuous human face haar course is utilized and a straightforward quick Principal Component Analysis is utilized to perceive the countenances identified with a high exactness rate. The coordinated face is then used to check participation of the workers. Expansion to this there is a strategy to deal with representative leaving demands through Natural Language Processing by endorsing or dismissing leaves and answers for all solicitations. This item gives considerably more

arrangements with precise outcomes in client intelligent way instead of existing participation and leave administration frameworks.

Face Representation, Face Detection, and Face Identification are unit approaches to recognize person profile picture. Face representation speaking to deal with various parameters like nose, eyes, lips, mouth. Selection one parameter and separation into organizes x-y axis .

Face Detection : Highlight based approach: Features of face are separated like nose, eyes, lips as sources of info and its division connected on it as yield which makes detail acknowledgment big amounts of unstructured data, such as text or binary data, that can be accessed from anywhere in the world via HTTP or HTTP. Using blob as storage to expose data publicly to the world, or to store application data privately. Blob stores data for

- Storing files for distributed access
- Streaming video and audio
- Performing secure backup and disaster recovery Storing data for analysis by an on-premises or Azure-hosted service.

IV. PROPOSED SYSTEM

Profile Image : Here user took a shot at profile confront pictures rather than frontal face pictures. The strategy depends on the portrayal of the first and morphological determined profile confront pictures For detection of image whether it is human pic or not PCA algorithm implemented on taken image Once image go through Eigen vector analysis the wake of normalizing the vector parts of profile confront picture, utilized the Euclidean separation coordinating measure for estimating and coordinating the closeness of the element vectors got from various face picture profiles. From above fig 1, The user capture image for recognition Eigen method implement on capture image .Extraction of face feature are taken out .After verify human face , login to home page of the system . Two types of user can login into the system Admin user and regular registered user, once admin logs in to the system admin can see complete registered users and can enable the newly created user and disabled the users which are already available due to security concerns. Histogram algorithm is use to compare the two images and it gives the accurate result than the other and stored the recognized image on blob storage. Histogram adjustment is utilized to upgrade difference between two compared images.

BLOB: In the broadest sense, the expression "blob" is ordinarily comprehended to signify "Paired Large Object." Many of us know about this term from its use in database-arrive, where "blob information" may be information put away in our database which does not fit in with a built up information write as characterized by the database. Such information are normally (if the database underpins it) persevered as plain parallel information (picture documents ring a bell for instance).The greater part of the real players in the "cloud" storage room have stretched out this thought to different non specific stockpiling usage which permit customer information of any kind to be transferred/continued on the merchant stockpiling server in paired arrangement. Amazon S3 executes a model in which parallel information ("Objects") are continued in "Cans." Windows Azure holds on double information ("Blobs") in "Compartments."

Blob storage

Azure is cloud service provider for storing, file manipulating, space management, multioperating etc. Blob stockpiling is an administration for putting away a lot of unstructured information, for example, content or double information, that can be gotten to from anyplace on the earth through HTTP or HTTPS. To store application information secretly utilized Blob stockpiling to open information freely to the world, Regular employments of Blob storage include Serving pictures or reports straightforwardly to a program ,Storing records for scattered data, Streaming video and sound ,Performing secure reinforcement and debacle recovery and Storing information for investigation by an on-premises or Azure-facilitated [29]

Blob service concept

The Blob benefit contains the accompanying segments

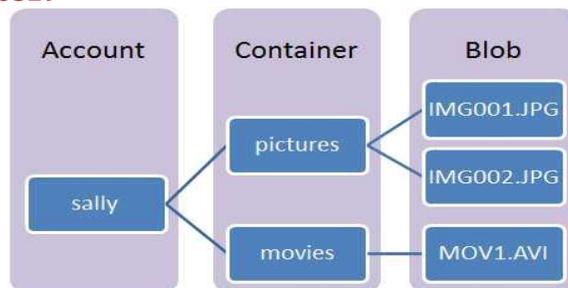


Fig 2 : working of blob

Capacity Account: All entrance to Azure Storage is done through a capacity account. See Azure Storage Scalability and Performance Targets for insights about capacity account limit.

Container: A holder gives a gathering of an arrangement of blobs. All blobs must be in a holder. A record can contain a boundless number of compartments. A compartment can store a boundless number of blobs. Note that the holder name must be lowercase.

Blob: A document of any kind and size. Purplish blue Storage offers three sorts of blobs: square blobs, page blobs, and attach blobs.

the azure blob storage model

An Azure Storage Account will consist of one or more Containers, which are created and named by the user to hold Blobs. All blobs must be placed in a container. In wide-ranging an Azure user can have up to five separate storage accounts.

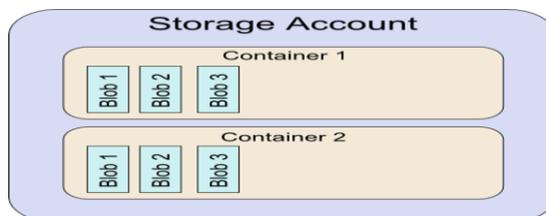


Fig 3 : storage account blob

An individual stockpiling record may contain a boundless number of compartments; individual holder may hold a boundless number of blobs. The aggregate size of all compartments may not exceed 100TB. Windows Azure characterizes two unmistakable sorts of blob – Block Blobs and Page Blobs square blobs are perfect for putting missing content or twofold records, for example, archives and media documents. Add blobs are like square blobs in that they are comprised of pieces, however they are enhanced for attach tasks, so they are valuable for logging situations. A solitary square blob or attach blob can contain up to 50,000 pieces of up to 4 MB each, for an aggregate size of marginally in excess of 195 GB (4MbX50,000) [33].

APPLICATIONS : Easy Integration : This framework give biometric confront. Coordinated biometric facial frameworks are additionally simple to program into organizations PC framework.

Better Security : framework gives better security to organizations and friends workers.

Automated Facial System : In this framework faces are refreshed over the time.

In business world, for example, in organizations, schools for security reason.

In business segment, for example, in managing an account.

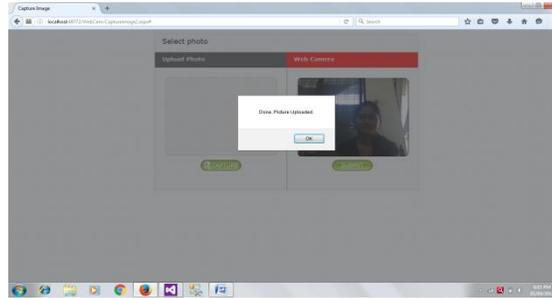


fig 4 : image capture and store on blob

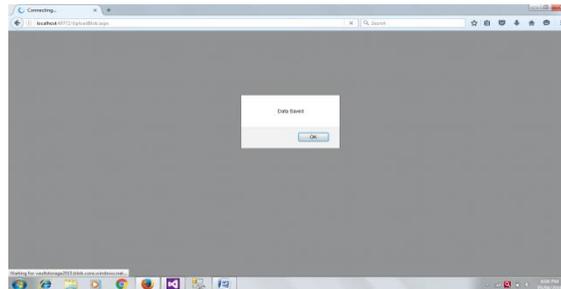


fig 5: page shows that users all information is saved on blob

When EnableCust value is 0 then User is Disable and EnableCust value is 1 Then Enable

	CustomerId	Fname	Mname	Lname	Address	Email	MobileNo	EnableCust
Enable/Disable	1000	dfdf	dfdf	dfdf	dfdf	ewesw	dfdf	
Enable/Disable	1002	Monali	Khushal	Lonkar	Nandavan Nagpur	monallonkar25@gmail.com	9604948320	1
	empid	full_name	age	gender	emailID	post	salary	EnableCust
Enable/Disable	1	raj	33	m	raj@raj.com	Team_Lead	10000	1
Enable/Disable	2	sdfsf	22	Male	sdf@fds.com	Manager	20000	1
Enable/Disable	3	sfsdfsd	23	Female	sdf@fds.com	Manager	20000	1
Enable/Disable	4	dfsdfsf	34	Male	fsdf@fdf.com	Manager	20000	0
Enable/Disable	5	rajan devgan	18	Male	dfsdf@fdsf.com	Manager	20000	1
Enable/Disable	6	navin	22	Male	sdf@fds.com	Manager	20000	1
Enable/Disable	7	monaka dharma	60	Female	dharmamonika@gmail.com	Manager	20000	1
Enable/Disable	8	Risha Dewaji Nahwale	20	Female	rishanalwale@gmail.com	Manager	20000	1
Enable/Disable	9	pallavi prem panakar	21	Female	pallavi.panakar93@gmail.com	Manager	20000	1
Enable/Disable	10	pakhi	20	Female	pakhibandole@gmail.com	Worker	5000	1
Enable/Disable	11	monali	21	Female	monallonkar25@gmail.com	Manager	20000	1

fig 6 : database of information is stored on blob

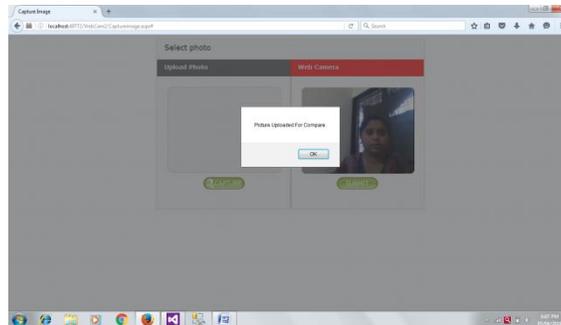


fig 7 : comparison of stored image with new image using proposed technique.

Table 1 : Recognition Rate for different algorithm of face recognition.

Reference	Algorithm	Database	Images	Recognition rate
[2]	Principal component analysis (PCA), Artificial Neural network (ANN), K-means, Fuzzy Ant with fuzzy C-means	ORL face	10 images for 40 distinct subjects	97.08 %
[20]	PCA, gradientfaces (GRF) based normalization technique	Youtube Makeup Face (YMU) Database	151 Caucasian female	84.50%
[21]	convolution neural network (CNN) algorithms, KNN (K-Nearest Neighbor	Japanese Female Facial Expression Database (JAFFE), Cohn-Kanade Dataset (CK+)	213 images of 10 Japanese women	Accuracy : 80.303 % (CK+) 76.7442 % (JAFFE)
[24]	SOM, multi-layer perceptions (MLP) Classifier	FACS (Facial Action Coding System), Cohn-Kanade, FG-NET	18 different individuals, 486 image (Cohn-Kanade), 364 (FG-NET)	88.8%
[32]	Support vector machine, Deep Convolutional Neural Network(DCNN)	JAFFE, CK+	327 video sequences as 213 facial images (JAFFE), 213 images (CK+ dataset)	Accuracy : 97.08 (CK+) 98.12 (JAFFE)
[36]	Multi Layer Perceptron MLP neural network	Three databases : GEMEP FERA 2011, Cohn-Kanade, FER-2013	Video : 155 for training & 134 for testing	89.62 %

The above table shown recognition rate used by various algorithm on different databases. It is found PCA algorithm recognition rate is more as compared to other algorithm for JAFFE and CK+ database.

VI. CONCLUSION & FUTURE SCOPE

Thus, developed technique for Image Recognition Of Profile Based On Blob by using the PCA algorithm and Histogram algorithm. The Emguvcv library is used for identification of images. Experimental result shows images of compared face images and studied various paper to find recognition rate and databases used till now for different algorithm. Using all these techniques, a high level of security software for company is implemented. In future, tried to detect any faces under any light conditions. Also motion picture to recognized with high percent of recognition rate

REFERENCES

1. S.P.Khandait, Dr.R.C.Thool, P.D.Khandait "Automatic Facial Feature Extraction and Expression Recognition based on Neural Network" (IJACSA) International Journal of Advanced Computer Science and Applications, Vol. 2, No.1, January 2011.
2. Suguna M K, Shrihari M R, Mahesh M R "Implementation of Face Recognition in Cloud Vision Using Eigen Faces" IJERA, ISSN : 2248-9622, Vol. 4, Issue 7(Version 3), July 2014, pp.151-155
3. Nitin Sharma, Ranjit Kaur "Review of Face Recognition Techniques" International Journal of Advanced Research in Computer Science and Software Engineering IJARCSSE, ISSN: 2277 128X , Volume 6, Issue 7, July 2016
4. Ashutosh Chandra Bhensle, Rohit Raja "An Efficient Face Recognition using PCA and Euclidean Distance Classification" IJCSMC, Vol. 3, Issue. 6, June 2014, pg.407 – 413.
5. S. Karamizadeh1, S. M. Abdullah1, A. A. Manaf, M. Zamani1, A. Hooman "An Overview of Principal Component Analysis" Journal of Signal and Information Processing, 2013, 4, 173-17
6. Thuseethan, S., Kuhanesan, S. "Eigenface Based Recognition of Emotion Variant Faces" IISTE ISSN 2222-1719, Vol.5, No.7, 2014
7. Payal Dangi, Shabbir Ahmad "Survey of Face Recognition using ICA" IJRICC, Volume: 3 Issue: 10, ISSN: 2321-8169
8. Mohammed Javed, Bhaskar Gupta "Performance Comparison of Various Face Detection Techniques" , International Journal of Scientific Research Engineering & Technology (IJSRET), ISSN 2278 – 0882 , Volume 2 Issue1 pp 019-0027 April 2013
9. Sanjeev Kumar , Harpreet Kaur "FACE RECOGNITION TECHNIQUES: CLASSIFICATION AND COMPARISONS", International Journal of Information Technology and Knowledge Management, July-December 2012, Volume 5, No. 2, pp. 361-363.
10. G.T.Shrivakshan, Dr.C.Chandrasekar "A Comparison of various Edge Detection Techniques used in Image Processing" IJCSI International Journal of Computer Science Issues, Vol. 9, Issue 5, No 1, September 2012 ISSN (Online): 1694-0814
11. Sivashankar S , Renita Remy "A Real Time FPGA Based Face Recognition System for Attendance Management & Power Control in Institutions / Corporates", Global General Research and Analysis International volume :3 , Issue :4 April 2014 ISSN NO : 2277 -8160
12. Yukti Bakhshi, Sukhvir Kaur, Prince Verma "A Study based on Various Face Recognition Algorithms", International Journal of Computer Applications (0975 – 8887), Volume 129 – No.13, November 2015.
13. Yongzhong Lu, Jingli Zhou, Shengsheng Yu "A Survey of Face Detection, Extraction and Recognition", Manuscript received 23 June 2002; revised 27 January 2003
14. Shiwani, Dr. Kamal Sharma1 , Er. Kaushal Kisore "Comparative Study of Face Recognition using ANN and BFO Technique", IJIREICE , ISSN (Print) 2321 – 5526, Vol. 5, Issue 3, March 2017.
15. Sandeep Kumar, Sukhwinder Singh, Jagdish Kumar "A Study on Face Recognition Techniques with Age and Gender Classification" research gate publication , May 2017
16. Hehua Chi a, Lianhua Chi b , Meng Fang a, Juebo Wu "Facial Expression Recognition Based on Cloud Model" The International Archives of the Photo grammetry, Remote Sensing and Spatial Information Sciences, Vol. 38, Part II .

17. Supriti Gupta, Dr. Anil Ahlawat “A Review of Face Detection and Recognition using Hybrid Approaches” *International Conference on New Frontiers of Engineering, Science, Management and Humanities (ICNFESMH-2017)*, ISBN: 978-81-934083-0-8, 21st May 2017
18. V.V. Starovoitov, D.I Samal, D.V. Briliuk “Three Approaches for Face Recognition” , *The 6-th International Conference on Pattern Recognition and Image Analysis October 21-26, 2002, Velikiy Novgorod, Russia*, pp. 707-711
19. Mayank Agarwal, Nikunj Jain, Mr. Manish Kumar and Himanshu Agrawal “Face Recognition Using Eigen Faces and Artificial Neural Network”, *International Journal of Computer Theory and Engineering*, Vol. 2, No. 4, August, 2010 ,1793-8201.
20. Bruce Poon, M. Ashraf Amin, and Hong Yan “Improved Method for Distorted Images due to Facial Makeup”, *Proceedings of the International MultiConference of Engineers and Computer Scientists 2017 Vol I, IMECS 2017, March 15 - 17, 2017, Hong Kong*.
21. Ke Shan, Junqi Guo*, Wenwan You, Di Lu, Rongfang Bie “Automatic Facial Expression Recognition Based on a Deep Convolutional-Neural-Network Structure”, 978-1-5090-5756-6/17/\$31.00 ©2017 IEEE, June 7-9, 2017, London, UK
22. Giovanni Betta, Domenico Capriglione, Mariella Corvino, Alberto Lavatelli, Consolatina Liguori, Paolo Sommella, Emanuele Zappa “Metrological characterization of 3D biometric face recognition systems in actual operating conditions” ,*Research Gate* , April 2017, Volume 6, Number 1, 33-42, ISSN: 2221-870X
23. Mayank Agarwal, Nikunj Jain, Mr. Manish Kumar and Himanshu Agrawal “Face Recognition Using Eigen Faces and Artificial Neural Network”, *International Journal of Computer Theory and Engineering*, Vol. 2, No. 4, August, 2010 ,1793-8201.
24. Mu-Chun Su, Chun-Kai Yang, Shih-Chieh Lin, De-Yuan Huang, Yi-Zeng Hsien, and Pa-Chun Wang, “An SOM-based Automatic Facial Expression Recognition System”, *International Journal on Soft Computing, Artificial Intelligence and Applications (IJSCAI)*, Vol.2, No.4, August 2013.
25. Daniel Georgescu “A Real-Time Face Recognition System Using Eigenfaces”, *Journal of Mobile, Embedded and Distributed Systems*, vol. III, no. 4, 2011 , ISSN 2067 – 4074 .
26. Varun Jasuja, Mr. Marish Singla, Mr. Rajesh “ MULTIPLE FACE DETECTION & RECOGNITION Using Principal Component Analysis Algorithm”, *I.J. of Computer Science Engineering and Information Technology*, 2015 Published Online Nov 2015 in IJCSEIT (<http://www.ijcseit.com>)
27. Lahiru Dinalankara “Face Detection & Face Recognition Using Open Computer Vision Classifies” , *reaserch gate* , 04 August 2017.
28. Ajinkya Kharatkar, Snehal Shekokar, Nikita Sable, Lect. Swapna Lokhande “Face Expression and Analysis”, *International Journal of Advanced Research in Computer Science and Software Engineering* , Volume 4, Issue 3, March 2014, ISSN: 2277 128X
29. Y.Nandini, Mrs.B.Lakshmi Sirisha “Detection of Vehicles in Highway Traffic Images Using Differential Morphological Profile and Blob Detection”, *International Journal of Science, Engineering and Technology Research (IJSETR)*, Volume 4, Issue 8, August 2015.
30. S. P. Shinde, V.P.Deshmukh “IMPLEMENTATION OF PATTERN RECOGNITION TECHNIQUES AND OVERVIEW OF ITS APPLICATIONS IN VARIOUS AREAS OF ARTIFICIAL INTELLIGENCE”, *International Journal of Advances in Engineering & Technology*, Sept 2011©IJAET, Vol. 1, Issue 4, pp. 127-137, ISSN: 2231-1963.
31. Ignacio Bravo , Manuel Mazo, José L. Lázaro, Alfredo Gardel, Pedro Jiménez and Daniel Pizarro “An Intelligent Architecture Based on Field Programmable Gate Arrays Designed to Detect Moving Objects by Using Principal Component Analysis”, *Sensors* 2010, 10, 9232-9251, 15 October 2010, ISSN 1424-8220
32. Veena Mayya, Radhika M. Pai., Manohara Pai M. M. “Automatic Facial Expression Recognition Using DCNN”, *6th International Conference On Advances In Computing & Communications, ICACC 2016, ELSEVIER*, 6-8 September 2016, Cochin, India.
33. Aniket Patil, Mrinai Dhanvijay, “BLOB DETECTION TECHNIQUE USING IMAGE PROCESSING FOR IDENTIFICATION OF MACHINE PRINTED CHARACTERS”, *INTERNATIONAL JOURNAL OF INNOVATIONS IN ENGINEERING RESEARCH AND TECHNOLOGY [IJIERT]*, VOLUME 2, ISSUE - 10, Oct.-2015, ISSN: 2394-3696

34. Sukhjinder Singh , R. K. Bansal , Savina Bansal , “Comparative Study and Implementation of Image Processing Techniques Using MATLAB”, *International Journal of Advanced Research in Computer Science and Software Engineering*, Volume 2, Issue 3, March 2012 ISSN: 2277 128X
35. K. Sai Prasad Reddy , Dr. K. Nagabhushan Raju “ Design and Implementation of an Algorithm for Face Recognition by using Principal Component Analysis (PCA) in MATLAB”, *International Journal of Advanced Research in Computer Science and Software Engineering*, Volume 6, Issue 10, October 2016, ISSN: 2277 128X
36. Hayet Boughrara ,Mohamed Chtourou ,Chokri Ben Amar ,Liming Chen, “Facial expression recognition based on a mlp neural network using constructive training algorithm”, Springer ,28 October 2014.
37. Manisha Dr Jagjit Singh Dr Neelam R. Prakash “Facial Expression Recognition Using Neural Network”, *(IJCSIT) International Journal of Computer Science and Information Technologies*, Vol. 6 (3) , 2015, 3249-3251
38. Farah Dhib Tatar ,Mohsen Machhout “Implementation of an Image Processing Algorithm on a Platform DSP Tms320c6416”, *(IJACSA) International Journal of Advanced Computer Science and Applications*, Vol. 8, No. 11, 2017
39. P. Ayyalasomayajula , S. Grassi , N. Deurin , P.-A. Farine , T. Gu’eguen “IMPLEMENTATION OF AN IMAGE RECOGNITION ALGORITHM ON THE DM6446 DAVINCI PROCESSOR”, *Proceedings of the 4th European DSP in Education and Research Conference (EDERC 2010)*, Nice, France, December 1-2, 2010.
40. C. T. Johnston, K. T. Gribbon, D. G. Bailey “Implementing Image Processing Algorithms on FPGAs”, *ResearchGate* , 06 June 2014.
41. J.ASHOK, D.R.E.G.RAJAN, “Principal Component Analysis Based Image Recognition”, *(IJCSIT) International Journal of Computer Science and Information Technologies*, Vol. 1 (2) , 2010, 44-50